


**GENERAL NOTES**

1. At the beginning and end of the fire lane, the sign shall have a single headed arrow pointing in the direction the regulation is in effect. The intermediate signs shall have double headed arrows pointing in both directions.
2. The maximum spacing of the signs shall be 100', contingent upon the City Engineer's review and approval.
3. The signs shall be set at an angle of not less than 30° nor more than 45° with the curb or line of traffic flow.
4. The clearance to the bottom of the sign shall be 7'. There shall be no other signs attached to the sign or the sign pole.
5. The sign plate shall be a minimum of 12" x 18" with a thickness of 0.80".
6. The sign face shall meet the COB sign sheeking standards. Use the standard sign face blank for a R7-32 or equivalent.
7. Signage letter shall be from the "CLEARVIEW" Font.

Fire Lane Sign Base

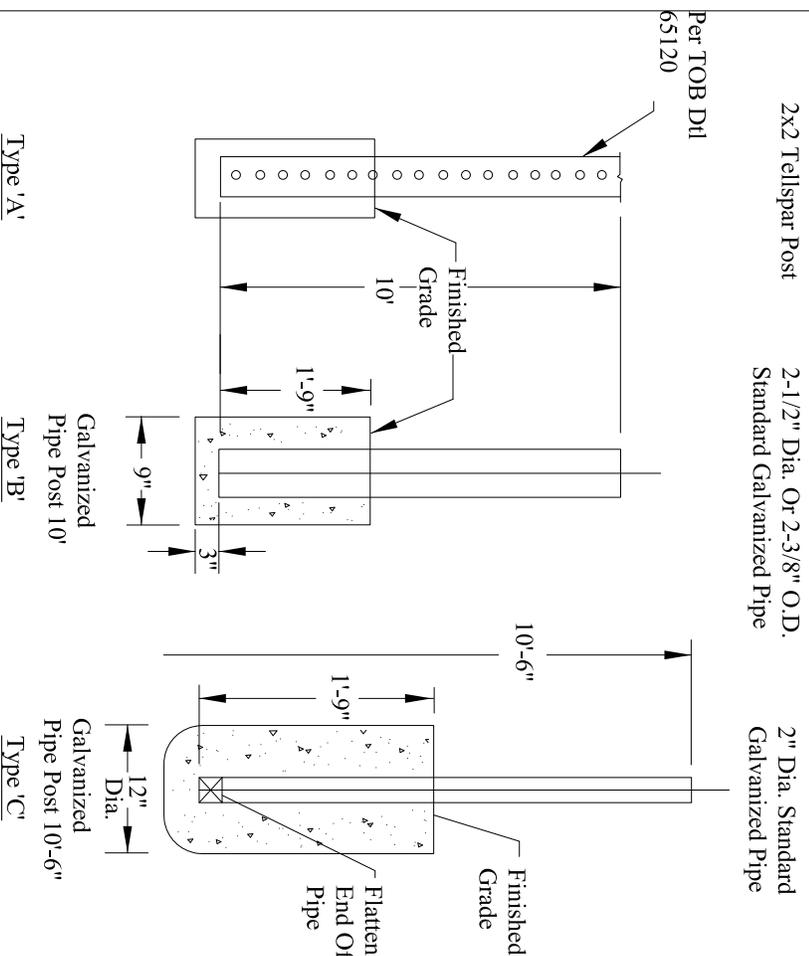

- Type 'A': 2x2 Tellspaar Post
- Type 'B' & 'C': Concrete base foundations shall be Class 'C' concrete.